



WET POUR RUBBER MIXER

The Wet Pour Rubber Mixer is a high-performance mixing solution designed for professional contractors. Engineered for efficiency, durability, and ease of use, this mixer ensures a consistent and thorough blend of screed materials, making it ideal for flooring applications, construction projects, and industrial use.

Manufactured By: W.A.S.P Equipment
For Australian Surfacing Supplies



Key Features


- High-efficiency screed mixing performance
- Rugged construction for durability in harsh environments
- Reliable motor and gearbox combination ensuring consistent performance
- Protective enclosure with high ingress protection ratings (IP55/IP65)
- User-friendly direct-on-line starter with overload protection

Motor Specifications

| | |
|----------------------|-----------------------|
| Motor Type: | TML 90L-4 |
| Voltage: | 240V |
| Frequency: | 50Hz |
| Power Output: | 1.5kw |
| Speed: | 1420 RPM |
| Current: | 8.21A |
| Power Factor (cosφ): | 0.97 |
| Capacitor: | 200/40 μF, 300/450V |
| Bearing Type: | 6205 ZZ C3 (DE & NDE) |
| Protection Rating: | IP55 |
| Insulation Class: | F |
| Mounting Type: | IM B35 |
| Compliance: | IEC 60034-1 |


Gearbox Specifications

| | |
|-----------------------------------|---------------|
| Brand: | Transtecno |
| Model: | TCM090040U128 |
| Gear Ratio (i): | 40 |
| Input Speed (n ₁): | 1400 RPM |
| Output Speed (n ₂): | 35 RPM |
| Output Torque (M _{n2}): | 434 Nm |

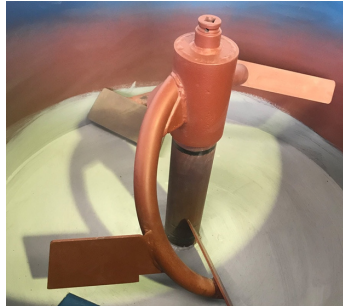

Magnetic Starter Specification

| | |
|---------------------------------|---------------------------------------|
| Model: | HUFB-gGXC |
| Type: | Direct-On-Line (DOL) Magnetic Starter |
| Phase: | 3Φ |
| Utilization Category: | AC3.1.1-0 |
| Operating Voltage: | 240V~ |
| Coil Voltage: | 240V~ |
| Frequency: | 50/60Hz |
| Overload Protection Range: | 7.2 - 10A |
| Ingress Protection (IP Rating): | IP65 |
| Compliance: | IEC 60947-4-1, CNS C4084 |
| Manufacturer: | TECO |

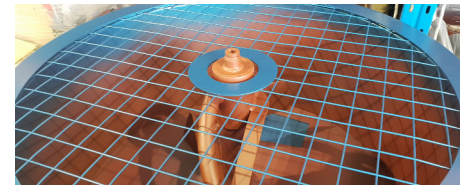

12 month Manufacturers Warranty